

# HAIKU INDOOR

THE CEILING FAN, REINVENTED



## Airfoil Finishes



## Hardware Finishes



Construction Features						
Airfoils	Motor	Controls <sup>1</sup>	Onboard Sensors <sup>2</sup>	Mounting	Environment	Accessories
Bamboo or aircraft-grade aluminum	High-efficiency, brushless DC/EC motor	Handheld remote Haiku mobile app Voice control 0–10 V (optional)	Temperature, humidity, and motion sensors enable SenseME Technology	Flat or sloped ceilings 8 ft (2.4 m) or taller	Indoor use only	Haiku Light Kit 0–10 V Module Optional extension tube lengths and a Stabilizer Kit are available for ceilings over 14 ft (4.3 m)

Ordering Information						
Diameter	Mount	Airfoil, Motor Finish	Country	Motor	Gen	Airfoil Finish (Aluminum Only)
52 inch: S3127 60 inch: S3150 84 inch: B213	52	Aluminum, Black: AB Aluminum, ORB: AO Aluminum, SN: AS Aluminum, White: AW Bamboo Caramel, Black: BC Bamboo Caramel, ORB: BCO Bamboo Caramel, SN: BCS Bamboo Caramel, White: BCW Bamboo Cocoa, Black: BW Bamboo Cocoa, ORB: BWO Bamboo Cocoa, SN: BWS Bamboo Cocoa, White: BWW	North America: 0402 Europe: 0502 Japan: 0602 Saudi Arabia, UAE: 0802	52 in: C 60 in: C 84 in: D	01	Black: F258 White: F259 Polished Aluminum: F421 Brushed Copper: F523 Brushed Aluminum: F531 Satin Nickel: F470 Oil-Rubbed Bronze: F471
	60	Low Profile: S0 Standard: A2 Universal: X2				
	84	Universal: X4				

## Haiku Light Kit



## Remote



Handheld remote



Remote with mount

<sup>1</sup> Voice control requires an Amazon Alexa-enabled device or the Google Assistant.  
<sup>2</sup> SenseME Technology and the Haiku mobile app are supported by Android™ and iOS®.

Lead times may vary.  
Warranty period and terms vary by country and application.



USA  
BIGASSFANS.COM  
877-244-3267

CANADA  
BIGASSFANS.COM  
844-924-4277

AUSTRALIA  
BIGASSFANS.COM/AU  
1300 244 277

SINGAPORE  
BIGASSFANS.COM/SG  
65 6709 8500


MALAYSIA  
BIGASSFANS.COM/SG  
603 5565 0888

# HAIKU INDOOR

THE CEILING FAN, REINVENTED




### Low Profile Mount

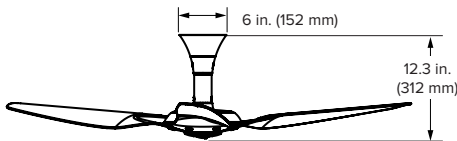


Flat ceilings as low as 8 ft (2.4 m)

### Standard Mount

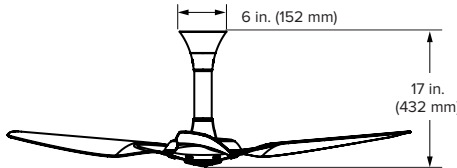

Flat ceilings from 8.5–11 ft (2.5–3.4 m)

### Universal Mount

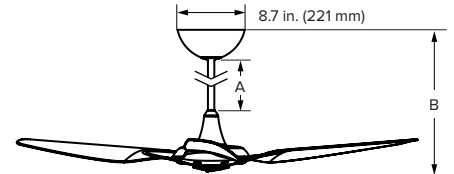

Sloped or flat ceilings from 9–18 ft (2.7–5.5 m)

### Universal Mount Downrod Lengths

Downrod (A) <sup>1</sup>	Included			Optional	
		20 in. (508 mm)	32 in. (813 mm)	7 in. (178 mm)	48 in. (1219 mm)
Fan Height (B) <sup>2</sup>	29 in. (737 mm)	41 in. (1041 mm)	16 in. (406 mm)	57 in. (1448 mm)	69 in. (1753 mm)
Ceiling Height	9.5–11 ft (2.9–3.4 m)	11–13 ft (3.4–4 m)	9–11 ft (2.7–2.9 m)	13–14 ft (4–4.3 m)	>14 ft (>4.3 m)

### Aluminum Fan Specifications

Diameter	Mount	Weight <sup>3</sup>	Max Speed	Airflow Min/Max	Watts Min/Max	Operating Voltage	Ambient Operational Temperature	Sound Level <sup>4</sup>
52 in. (127 cm)	Low Profile	16.5 lb (7.5 kg)	177 RPM	1,301 / 5,629 cfm	2.2 / 15.6 W	100–240 VAC, 1 Φ, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed <sup>3</sup>
	Standard	16.5 lb (7.5 kg)	200 RPM	1,389 / 6,713 cfm	2.1 / 20.7 W			
	Universal	15.5 lb (7 kg)	200 RPM	1,389 / 6,713 cfm	2.1 / 20.7 W			
60 in. (150 cm)	Low Profile	18.5 lb (8.4 kg)	177 RPM	1,070 / 6,698 cfm	1.9 / 18.4 W			
	Standard	18.5 lb (8.4 kg)	200 RPM	1,194 / 8,629 cfm	1.9 / 26.8 W			
	Universal	17.5 lb (8 kg)	200 RPM	1,194 / 8,629 cfm	1.9 / 26.8 W			
84 in. (213 cm)	Universal	26 lb (11.8 kg)	135 RPM	5,983 / 19,292 cfm	4.2 / 53.7 W			

### Bamboo Fan Specifications

Diameter	Mount	Weight <sup>3</sup>	Max Speed	Airflow Min/Max	Watts Min/Max	Operating Voltage	Ambient Operational Temperature	Sound Level <sup>4</sup>
52 in. (127 cm)	Low Profile	14 lb (6.4 kg)	177 RPM	1,483 / 5,866 cfm	2.2 / 19.2 W	100–240 VAC, 1 Φ, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed
	Standard	14 lb (6.4 kg)	200 RPM	1,427 / 6,597 cfm	2.3 / 26.6 W			
	Universal	13 lb (5.9 kg)	200 RPM	1,427 / 6,597 cfm	2.3 / 26.6 W			
60 in. (150 cm)	Low Profile	16 lb (7.3 kg)	177 RPM	876 / 6,165 cfm	1.9 / 15.5 W			
	Standard	16 lb (7.3 kg)	200 RPM	1,038 / 7,673 cfm	1.8 / 21.4 W			
	Universal	15 lb (6.8 kg)	200 RPM	1,038 / 7,673 cfm	1.8 / 21.4 W			
84 in. (213 cm)	Universal	21 lb (9.5 kg)	135 RPM	4,661 / 15,378 cfm	3.8 / 39.2 W			



<sup>1</sup> Optional downrod lengths packaged separately. Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.  
<sup>2</sup> Fan heights do not include the Haiku Light kit.  
<sup>3</sup> The precise fan weights will vary based on individual component weights and finishing.  
<sup>4</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

Lead times may vary.  
 Warranty period and terms vary by country and application.



USA  
 BIGASSFANS.COM  
 877-244-3267

CANADA  
 BIGASSFANS.COM  
 844-924-4277

AUSTRALIA  
 BIGASSFANS.COM/AU  
 1300 244 277

SINGAPORE  
 BIGASSFANS.COM/SG  
 65 6709 8500

MALAYSIA  
 BIGASSFANS.COM/SG  
 603 5565 0888